

FULL-HEIGHT TURNSTILE

SESAME TWIN - L

Y type rotor

Sesame Twin - L is also called double turnstile. This pedestrian security gate benefits with significant space and cost saving in comparison to two single turnstiles installed one near another. It is a perfect fit for applications with highest intensity of pedestrian traffic, like stadiums or large factories. Can be supplied both in fully welded or assembly (attractive for transportation) desing.



MODEL OF THE FULL-HEIGHT TURNSTILE SERIES

GUARANTEES FULL PROTECTION OF THE TERRITORY



20
pers/min
CROSSING CAPACITY
(through one pass)



650
mm
PASSAGE WIDTH



IP 41/54*

PROTECTIVE LEVEL



MOTORIZED



BI-DIRECTIONAL

Advantages

- Motorized
- Bi-directional
- Variety of metal and metal treatment types
- Three arms (angle between bars 120°) and four arms (angle between bars 90°) modifications
- Integration with any type of access control and ID systems
- Low power consumption
- Whisper quiet, low noise operation
- Possibility of customization
- Wide range of accessories
- Complete supply set as a standard
- Fail-safe (automatic opening in both direction when power goes off)

Standard

- Wired remote control panel
- 2 types of LED indication
- Fail-safe

Options

- Integration with passes counter/RFID device/coin acceptor push button/fingerprint/barcode/QR-code reader etc.)
- Remote radio controller
- Heating function for external installation (for cold climates)
- Backup battery 12V, 17 A·h
- Protective canopy or roof

* first figure is for indoor installation, second figure is for outdoor installation.
Protection level could be up to IP65 upon request.



www.tiso.global
+380 (44) 291-21-11
e-mail: sales@tiso.global



Technical Specifications:

Unit width, mm	2234
Unit length, mm	1158
Unit height, mm	2300
Weight, kg (not more)	550
Standard mechanism	Servo-drive (Motorized)

Controlled by:



access control system;




manual control

When power goes OFF both directions are open.

Electrical Specifications:

- Voltage:
 - from the AC 230V, 50/60Hz;
 - from a DC source 12 V;
- Maximum power consumption 55W per pass

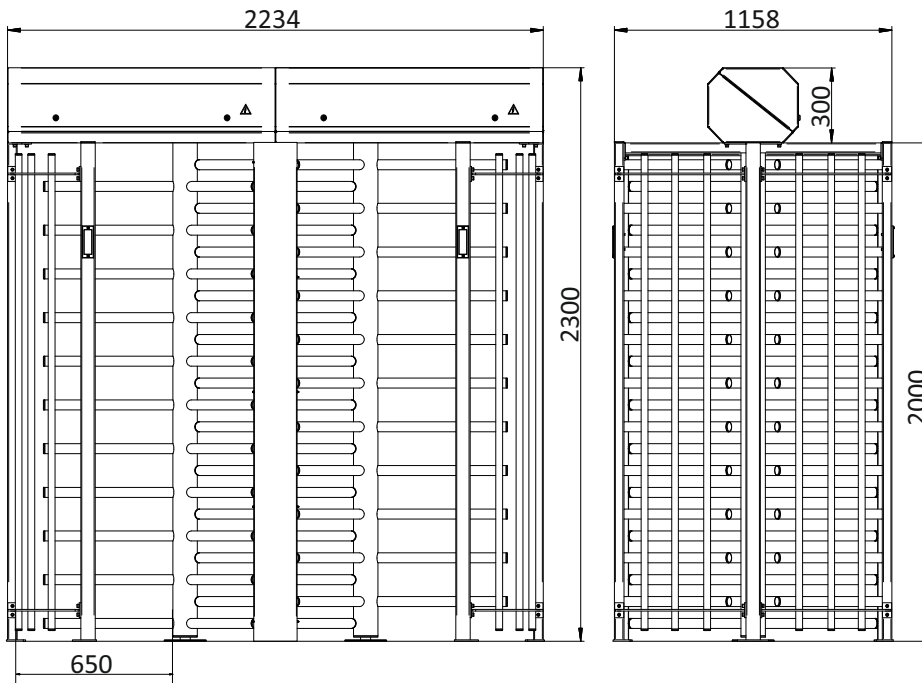

Materials

Standard housing	Brushed SS AISI 304
Available housing	Brushed SS AISI 316 Polished SS AISI 304 Polished SS AISI 316 Powder coated RAL

Installation areas:

- Governmental Institutions
- Military Bases
- Nuclear Power Plants
- Production sites (Industrial Plants)
- Commercial areas
- Financial institutions
- Airport Premises
- Business (Office) Centers
- Hotels
- Sport Complexes
- Recreation areas
- Urban areas
- Education Institutions
- others